

GRAS 40PH

CCP Free-field Array
Microphone



Freq range: 10 to 20 kHz
Dyn range: 32 dB(A) to 135 dB
Sensitivity: 50 mV/Pa

The GRAS 40PH Array Microphone is a low-cost microphone for general purpose measurements in arrays and matrices.

Typical applications and use

- Multi-channel measurements
- Sound-field analyses
- Sound-power measurements
- Concurrent spatial and transient measurements

Design

Array microphones are designed to be mounted on large or small arrays. Such systems are typically used for measuring and locating noise sources, and here the phase match is important to get good accuracy in the measurements. An important characteristic of array microphones are precisely that the microphones are phase-matched.

40PH has a wide useful frequency range reaching up to 20 kHz and a large dynamic range topping at around 135 dB, the peak value before visible clipping.

It has an integrated CCP preamplifier and is delivered with a built-in TEDS chip which enables it to be programmed as a complete unit. The GRAS 40PH requires a constant current power supply, e.g. the [GRAS 12AL](#) CCP Supply, or any other CCP compatible power supply.

Close manufacturing tolerances together with the advantages of the TEDS chip, provide the 40PH with a high degree of interchangeability; a major advantage when used in multiples forming arrays and matrices.

The low cost of the 40PH is a key consideration when setting up measurements requiring a multiplicity of concurrent transient and spatial data.


Calibrating the 40PH with a GRAS pistonphone, e.g. [GRAS 42AA](#), is as straight forward as calibrating any other GRAS 1/4-inch microphone.

All GRAS microphones are individually checked and

calibrated before leaving the factory. An individual calibration chart is supplied with each microphone.

Polarization/Connection		0 V / CCP
Frequency range (±1 dB)	Hz	50 to 5 k
Frequency range (±2 dB)	Hz	5 k to 20 k
Frequency range (±3 dB)	Hz	10 to 50
Dynamic range lower limit (microphone thermal noise)	dB(A)	< 32
Dynamic range upper limit	dB	135
Set sensitivity @ 250 Hz (±2 dB)	mV/Pa	50
Power supply (Constant Current Power)	mA	2 to 20
Microphone venting		Front
Output impedance	Ω	< 50
Temperature range, operation	°C / °F	-10 to 50 / -50 to 122
Temperature range, storage	°C / °F	-40 to 85 / -40 to 185
Influence of axial vibration @1 m/s ²	dB re 20 μPa	50
TEDS UTID (IEEE 1451.4)		27 v. 1.0
Connector type		SMB
CE/RoHS compliant/WEEE registered		Yes / Yes / Yes
Weight	g / oz	5.50 / 0.20
Phase Match		
50Hz - 100Hz		±5°
100Hz - 3kHz		±3°
3kHz - 5kHz		±5°
5kHz - 10kHz		±10°

Frequency response according to IEC 61672-1

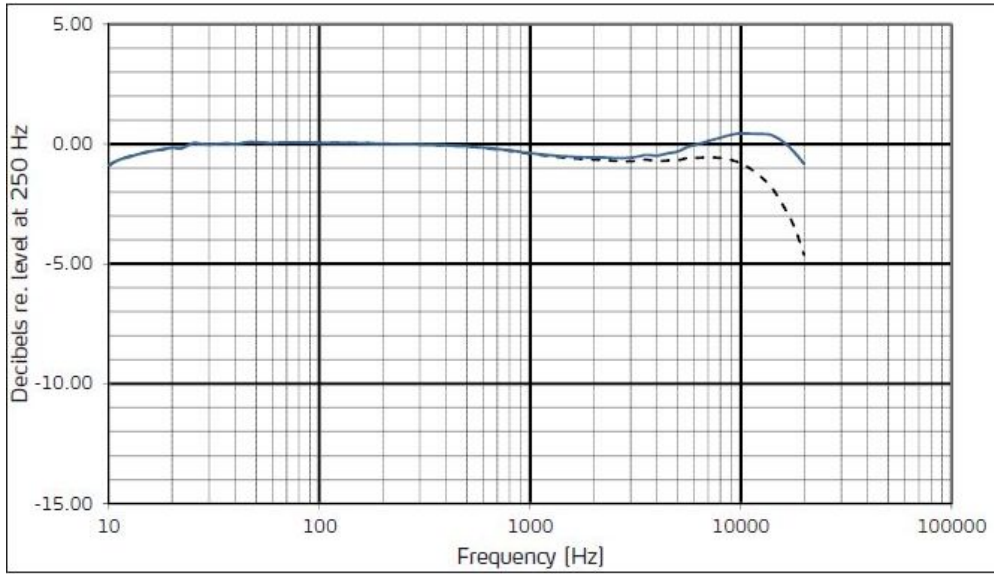


Typical frequency response

Upper curve shows free-field response at 0°, lower curve (dotted line) shows pressure response.

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

Dimensions in mm

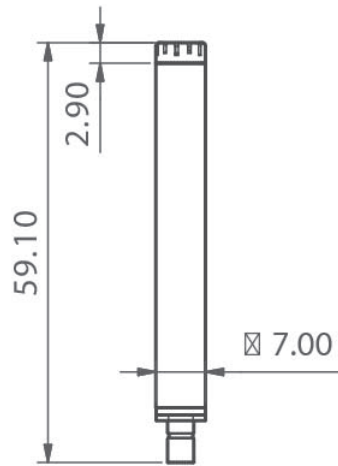

Optional items

GRAS AA0027	3 m SMB - BNC Cable
GRAS 12AL	1-Channel CCP Power Module with A-weighting filter
GRAS PR0002	Array Module
GRAS AM0364	Windscreens (set of 6)
GRAS RA0092	Rain-protection cap
GRAS 42AA	Pistonphone, Class 1
GRAS 42AG	Multifunction Sound Calibrator, Class 1

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

GRAS Worldwide

Subsidiaries and distributors in more
than 40 countries

GRAS SOUND & VIBRATION A/S
Skovlytoften 33
2840 Holte
Denmark
Tel: +45 4566 4046
gras@gras.dk

GRAS SOUND & VIBRATION USA
2234 East Enterprise Parkway
Twinsburg, OH 44087
United States
Tel: +1 330 425 1201
sales@gras.us

GRAS SOUND & VIBRATION UK
Building 115
Bedford Technology Park Thurleigh,
MK44 2YA Bedford
United Kingdom
Tel: +44 1234 639552
sales@gras.co.uk

GRAS SOUND & VIBRATION CHINA LTD.
Rm 1606, Kodak House II
No. 39 Healthy Street East North Point
Hong Kong
China
Tel: +852 2833 9987
sales@gras.com.cn



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones to industries where acoustic measuring accuracy and repeatability is of utmost importance in R&D, QA and production. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, and consumer electronics. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect and trust.

GRAS Sound
& Vibration